

## Acquire Smartzone Firmware for an Access Point

If you need to install firmware from a Smartzone controller to an AP manually, use the below steps to acquire that firmware to load. If you need instruction on how to load the firmware to the AP, please use the "Manual AP Firmware Procedures" document on [www.netadmin.us](http://www.netadmin.us) under the wireless section.

From a web browser with access to the Smartzone controller, access the following URL:

`http://x.x.x.x:91/wsg/firmware/YYYY_3.5.1.0.419.BL7`

Where x.x.x.x is the IP Address of the controller


Y is the either R, H, or T for the AP type

XXX is the model number of the AP

3.5.1.0.419 is the version of the controller AP Firmware

Example: `http://192.168.18.30:91/wsg/firmware/R610_3.5.1.0.419.BL7`

To get the AP Firmware version, go to System -> General Settings -> About Tab.

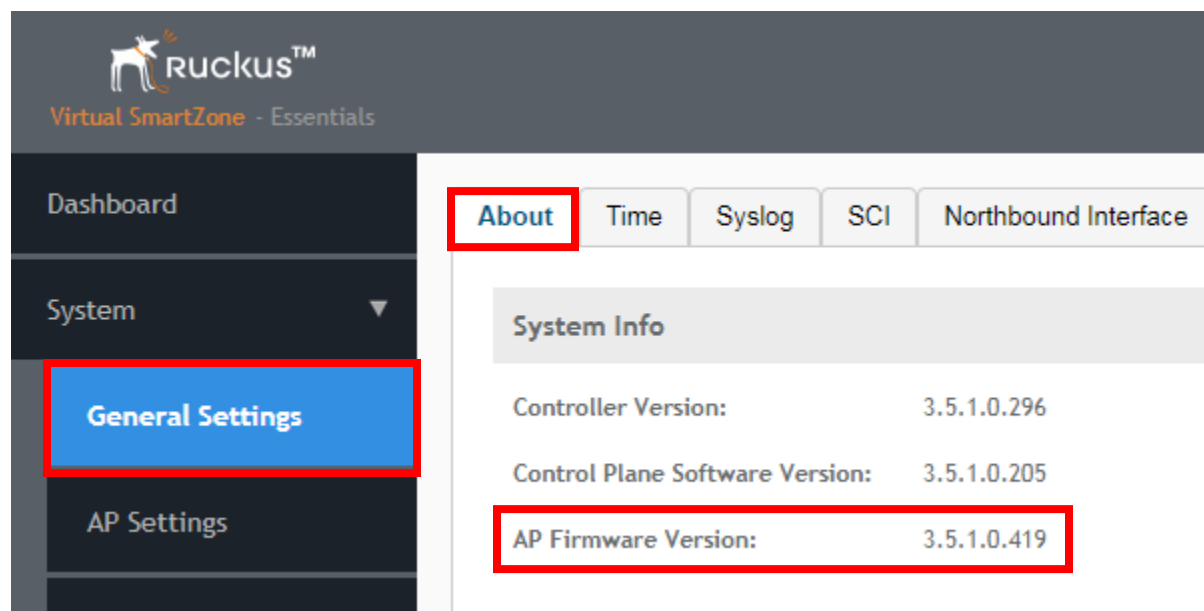

The screenshot displays the Ruckus Virtual SmartZone Essentials web interface. The left sidebar shows the navigation menu with 'General Settings' highlighted. The main content area shows the 'About' tab selected, displaying system information. The 'AP Firmware Version' is highlighted with a red box, showing the value 3.5.1.0.419.

System Info	
Controller Version:	3.5.1.0.296
Control Plane Software Version:	3.5.1.0.205
AP Firmware Version:	3.5.1.0.419